

NA - R6III

For Canon EOS R6III Camera

PN 17345

User Manual
Housing
FF- MIL

Introduction	2
Package Contents	2
Important Instructions	3
Part Names and Functions	4
Housing Mount	7
Opening the housing	8
Closing the housing	9
Preparation for Use	10
Optional Accessories	15
Care/Storage	17
Warranty	18
Specifications	19


INTRODUCTION

Thank you for purchasing this Nauticam product.

Before using the product, please read this manual thoroughly to familiarize yourself with full scope of functions on the product as well as ensuring that you will use the product correctly.


PACKAGE CONTENTS

Make sure that you have all the included items listed below before using this product.
If some items are missing or damaged, contact your local Nauticam dealer.

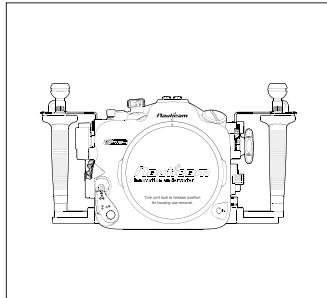


NA-R6III


(2 x Handles with Mounting Balls, 1 x Housing Cap,
2 x Optical Fiber Mount Caps, 2 x Stainless Steel Handle Brackets)

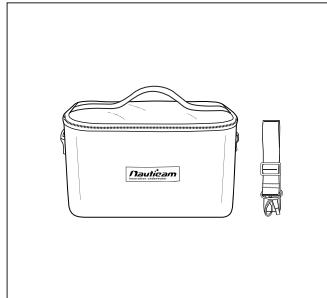


Padded Travel Case

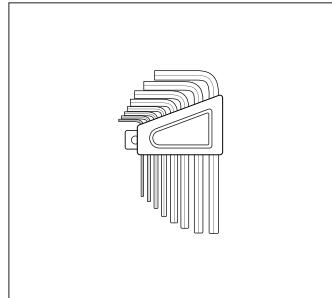

Allen key set

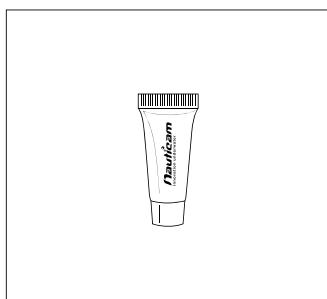


Lubricant

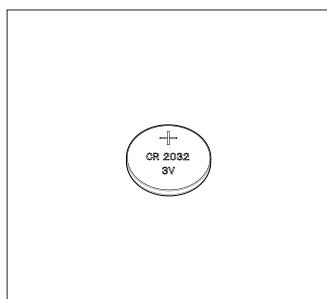


Panasonic CR2032 Battery

(pre-installed for Moisture Alarm)

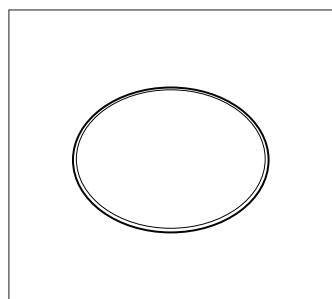

Spare Main O-ring
#90137

After purchase, we suggest that you reuse all packaging materials for future travelling.

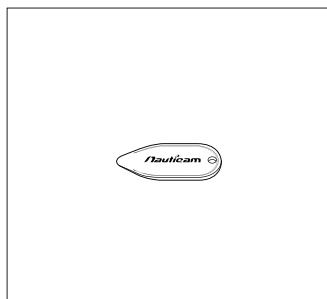

O-ring Remover

IMPORTANT INSTRUCTIONS

1

Water-tight test of the housing (without camera inside) before usage is recommended as well as any O-ring renewal and port change.

3

Only the accessories specified by Nauticam must be used. Third-party accessories may result in malfunctions or damage to the product.

5

Do not stretch any O-rings excessively. Only remove it using Nauticam O-ring remover.

7

Do not attempt to remove parts of the housing yourself. Repairs must be done at authorized service centers only.

9

Do not expose the housing in direct sunlight for a prolonged period.

11

Prevent any sand or dust or water penetration inside the housing. Be extra careful when changing lens and inserting or removing the camera.

2

Do not seal the housing when travelling by air as this may lead to a pressure difference between the atmosphere and inside the housing.

4

Use only Nauticam lubricant on silicone rubber O-ring.



6

Discontinue use immediately when there is a sign of leakage.

8

The housing should be positioned on a stable and safe surface on land.

10

Do not open the housing in wet or sandy environment. Protect the housing from moisture and debris in order to prevent malfunction or leakage.




12

This product is not intended for use by children, or persons with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they are supervised and/or given instruction by a responsible person concerning use of the product to ensure that they can use it safely.

PART NAMES AND FUNCTIONS



Rear View

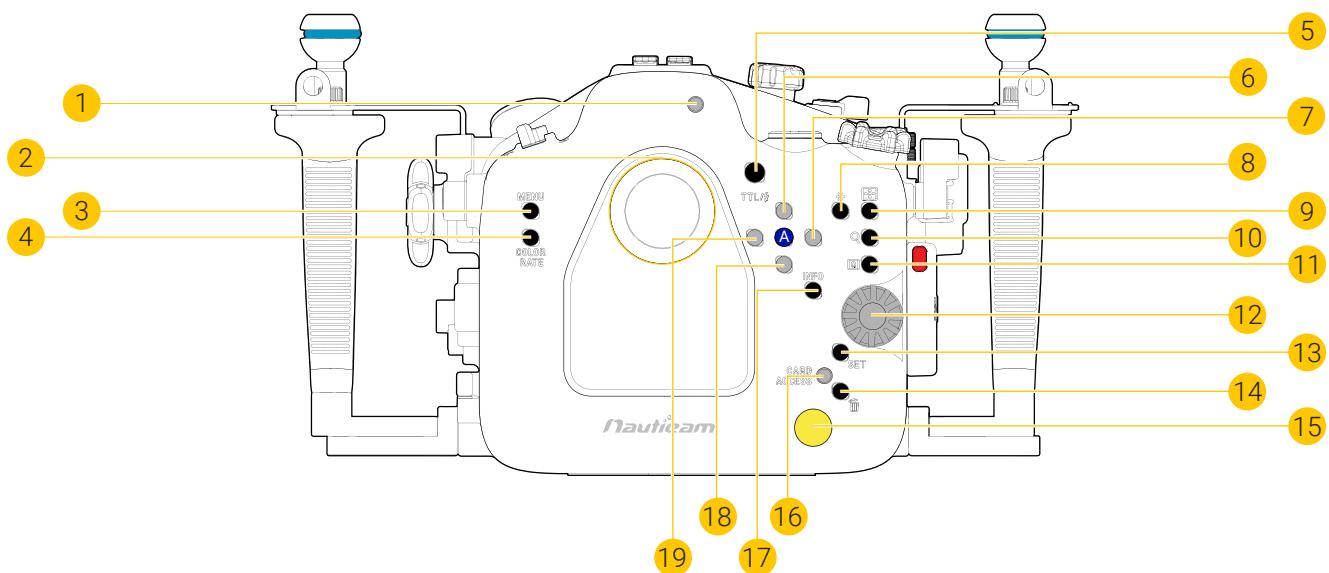

1	TTL Indicator window	2	Viewfinder
3	Menu button	4	Color Rate button
5	TTL on/off button	6	Multi selector - up
7	Multi selector - right	8	AE lock button
9	AF point selection	10	Magnify/reduce button
11	Quick control button	12	Quick control dial 1
13	Set button	14	Delete button
15	Moisture alarm window	16	Access lamp
17	Info button	18	Multi selector - down
19	Multi selector - left	A	Multi selector - center

PART NAMES AND FUNCTIONS


Top + Front Views

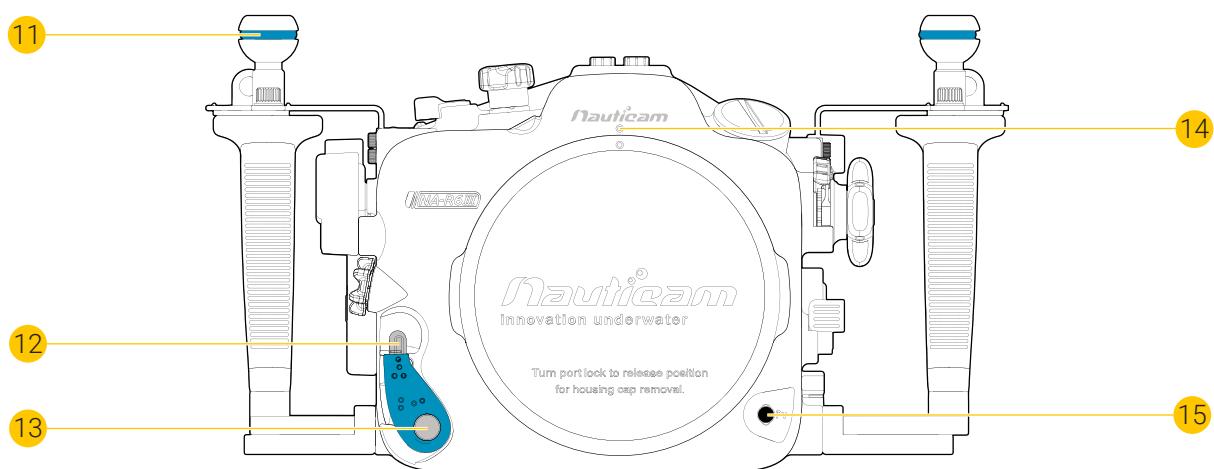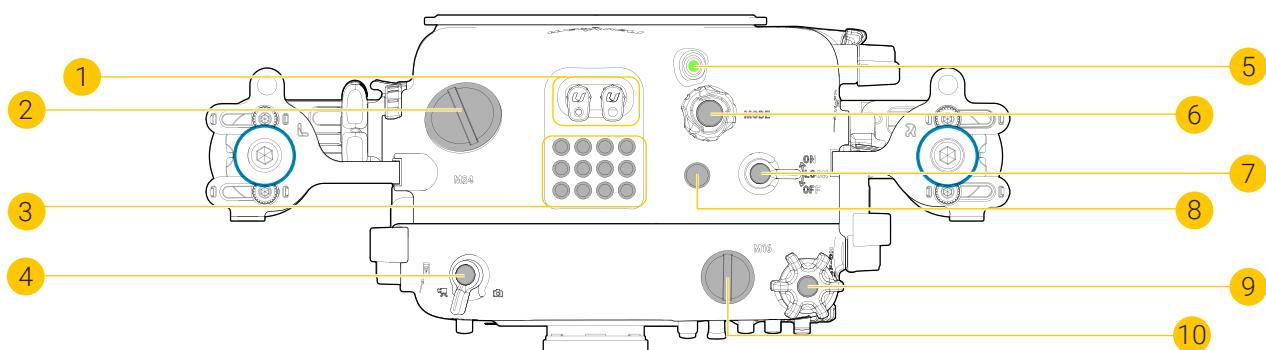

1	Optical fiber cable connection	2	M24 Accessory port
3	1/4" Threaded holes	4	Still photo / movie recording switch
5	Port lock safety indicator window	6	Mode dial
	<i>(Green circle) The port is securely locked when the window shows green</i>		
7	Main switch	8	M10 Accessory port
9	Rear dial	10	M16 Accessory port
11	Accessory mounting ball	12	Port lock safety button
13	Port locking lever	14	Lens release button


PART NAMES AND FUNCTIONS

Back + Side Views

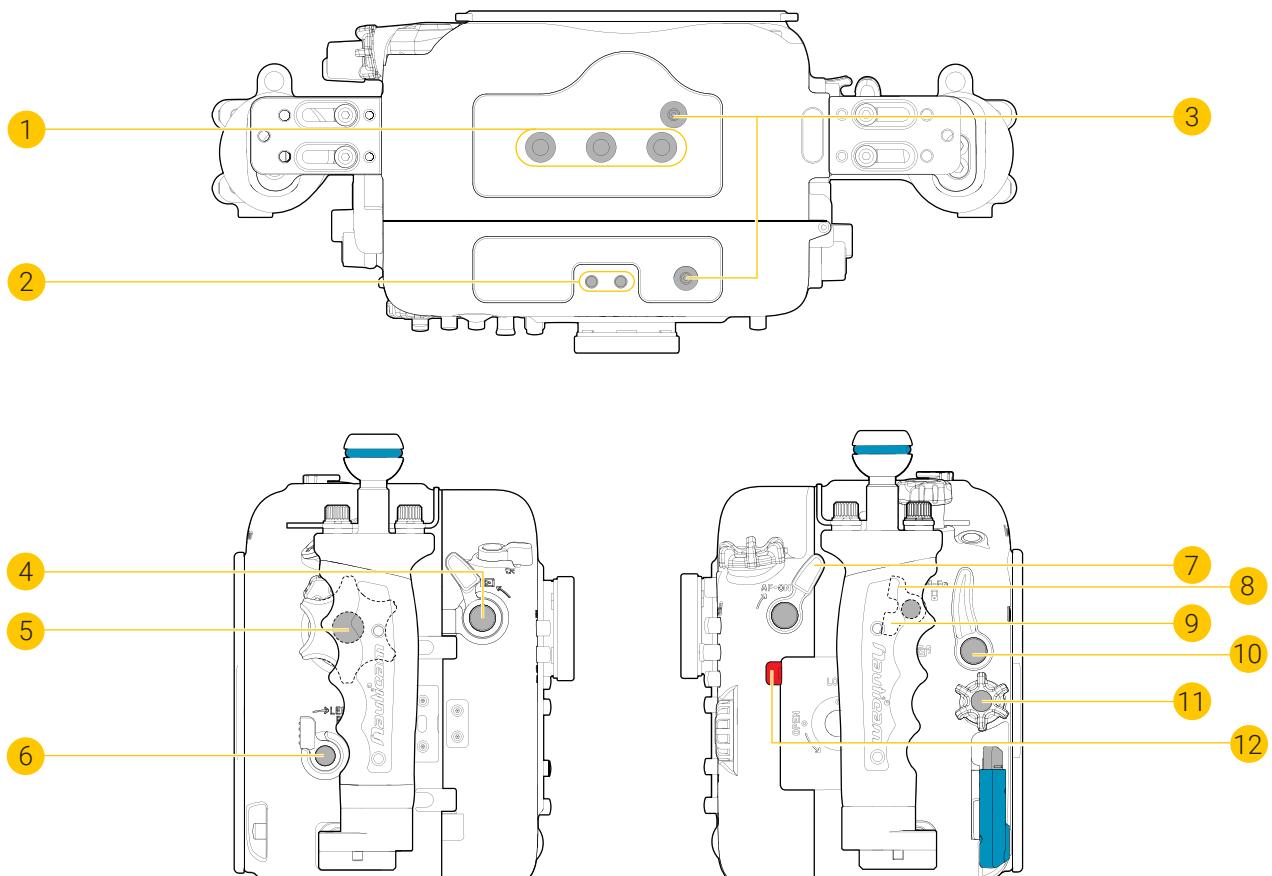

1	1/4" Threaded tripod holes	2	M5 Threaded holes
3	Sacrificial zinc anodes	4	Playback lever
5	Zoom/Focus knob	6	Lens release lever
7	AF-ON lever	8	M-Fn lever
9	REC lever	10	Shutter release lever
11	Front dial	12	Housing unlock button

HOUSING MOUNT

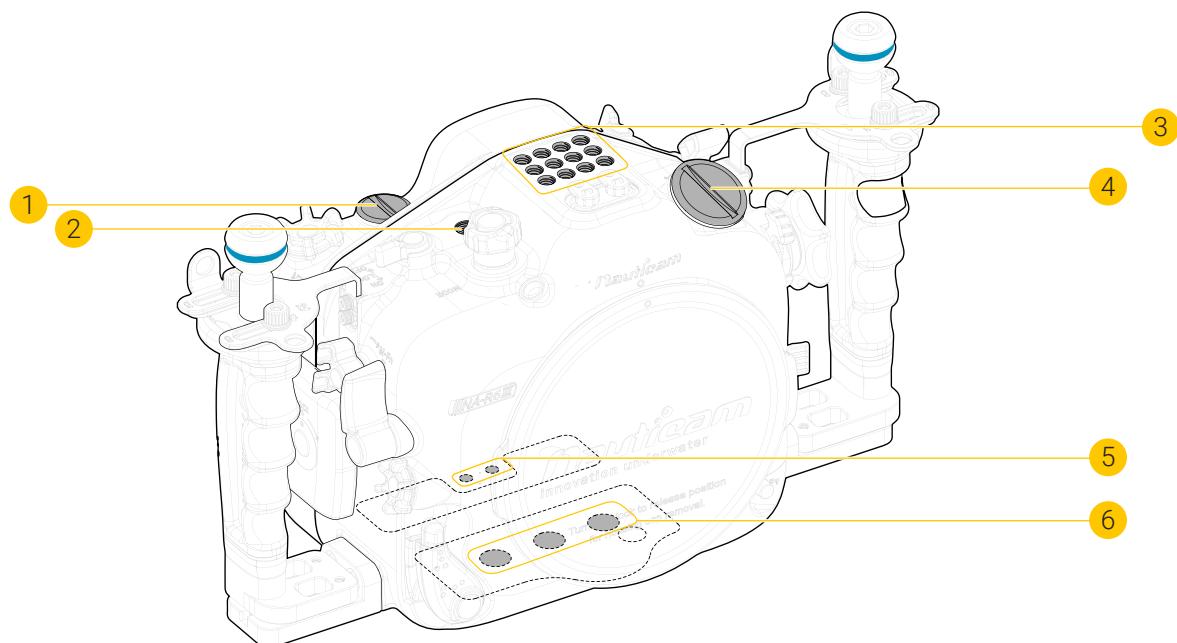

Housing mount


Compatible accessories

1	M16 Accessory port	25625	M16 Vacuum Valve II (Optional)
2	M10 Accessory port	25221	M10 Strobe mounting ball
		25224	M10 Strobe mounting ball with hole
3	1/4" -20 mounting threads	17959	Housing Mounting ball with 1/4" screws
4	M24 Accessory port	25017	M14 6 pin bulkhead for Canon system
		25020	Canon hotshoe plug to a M14 Nikonos bulkhead
		25086	M24 Adaptor for HDMI 2.0 able
		25099	M24A2R200-M28A1R170 HDMI 2.0 Cable
		25033	Standard HDMI bulkhead with M16 thread
		26326	M24-M16 Adaptor for use with 26325
		25100	HDMI (D-A) 1.4 Cable in 200mm length
			* HDMI1.4 cable can be installed using M24 or M16 accessory port
5	M5 Threaded holes	25218	Mounting ball set for tripod legs
6	1/4" -20 mounting threads	17954	Universal tripod plate
		17960	Universal Quadra-Pod Plate for Nauticam Housings

OPENING THE HOUSING


* drawings as illustrations only

1

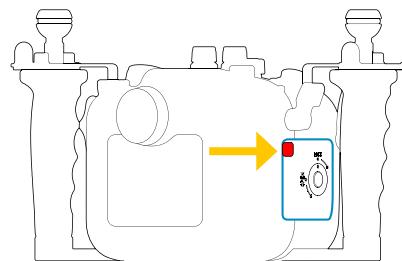


depress housing unlock button

2

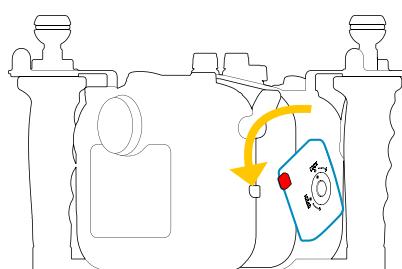

turn housing lock latch
anti-clockwise to open the
housing

3

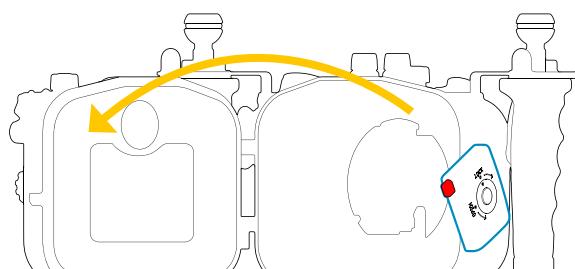


flip open the back housing
when lock latch is aligned to
'open' position

CLOSING THE HOUSING

* drawings as illustrations only


1

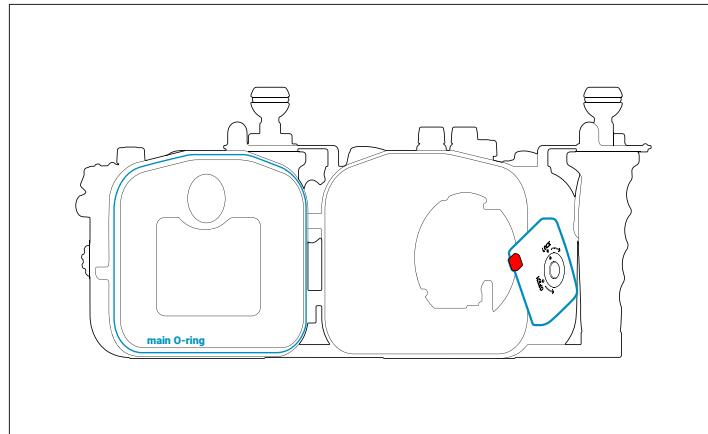

before closing the housing, clean and lubricate the main O-ring


make sure nothing is caught between front and back housing and that they are fully aligned before locking

2

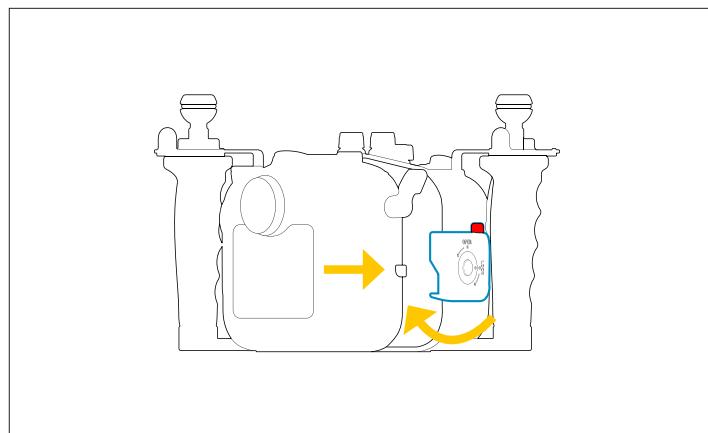

insert the housing shaft into the shaft hole and then rotate the lock latch clockwise until you hear and feel it click into place

3

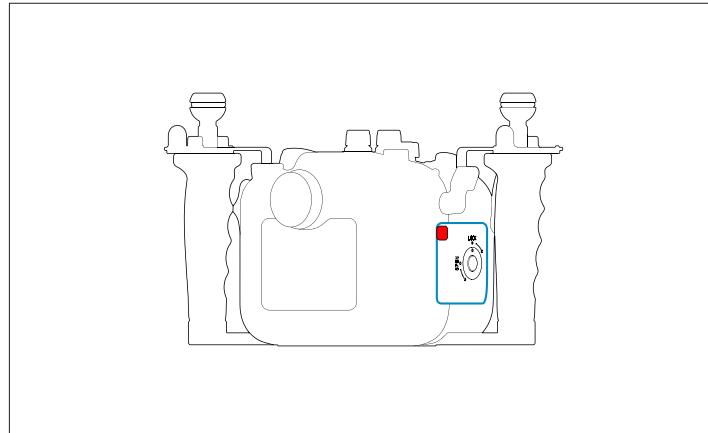


housing locked in place securely

PREPARATION FOR USE

* drawings as illustrations only


Installing the Camera - housing tray attachment

1

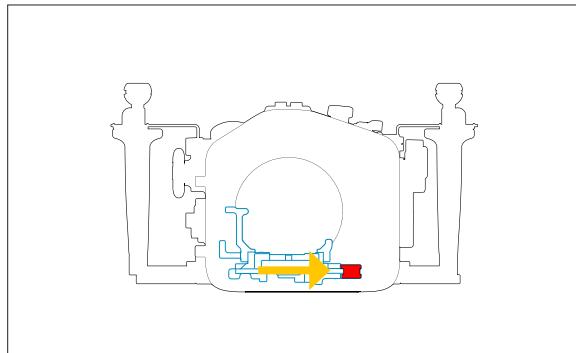

unlock camera tray lever and remove the tray from the housing


2

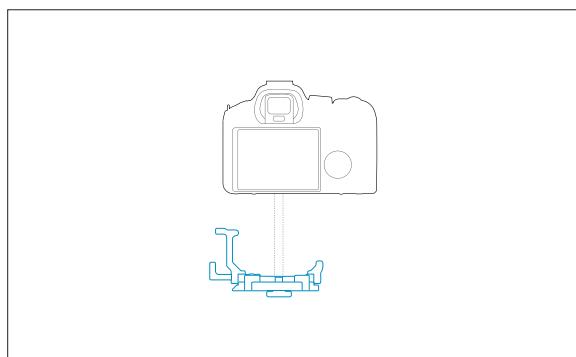

attach the camera tray by tightening the tray screw into the tripod socket of the camera

place the actuator on the camera tray in place and make sure it is engaged with the focus mode switch on the camera


3

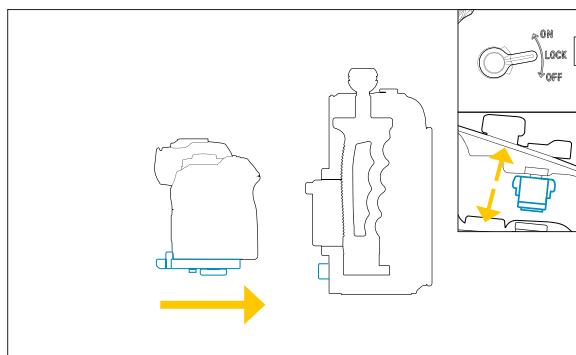

* lift up actuator of ON/OFF lever each time before installing the camera
* make sure the ON/LOCK/OFF lever is aligned with camera control before sliding the camera into the housing
* pull out the zoom/focus knob if installing the camera with lens and gear attached

slide the camera tray back into the housing along the tray rail

4

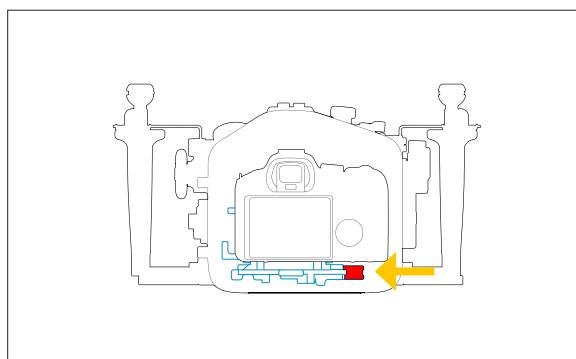

lock camera tray


* place the zoom/focus knob in place and make sure it is engaged with lens gear
* gently push the actuator of ON/OFF lever downwards to make sure it is engaged with the lever on the camera

PREPARATION FOR USE

* drawings as illustrations only

New Patented Port Mounting Design


1

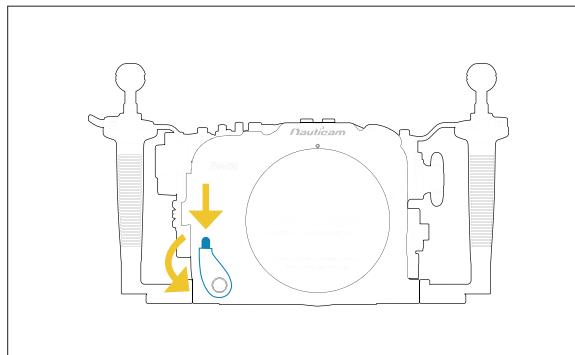

depress safety button and rotate anti-clockwise

remove housing cap from port mount


2

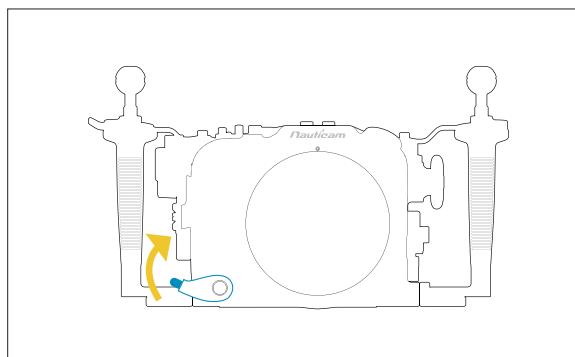

rotate locking lever clockwise to lock

⚠ Do not operate the blue lever with force

3

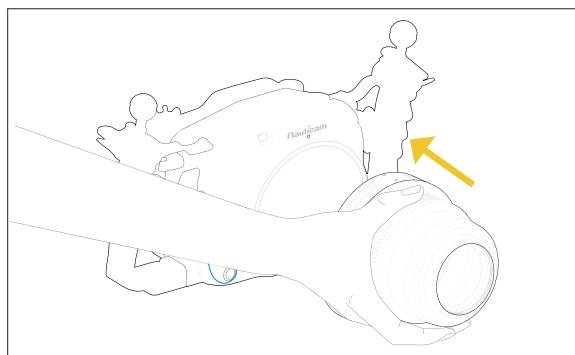


lubricant the port O-ring before mounting onto the housing

align the index mark

then push the port assembly straight in firmly until you can hear and feel a distinct 'click'

4

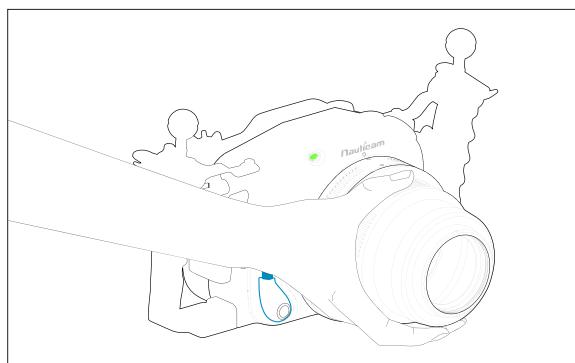


finally check the port lock safety indicator window

● the window shows green when the port is securely locked

PREPARATION FOR USE

* drawings as illustrations only

Coating housing O-ring

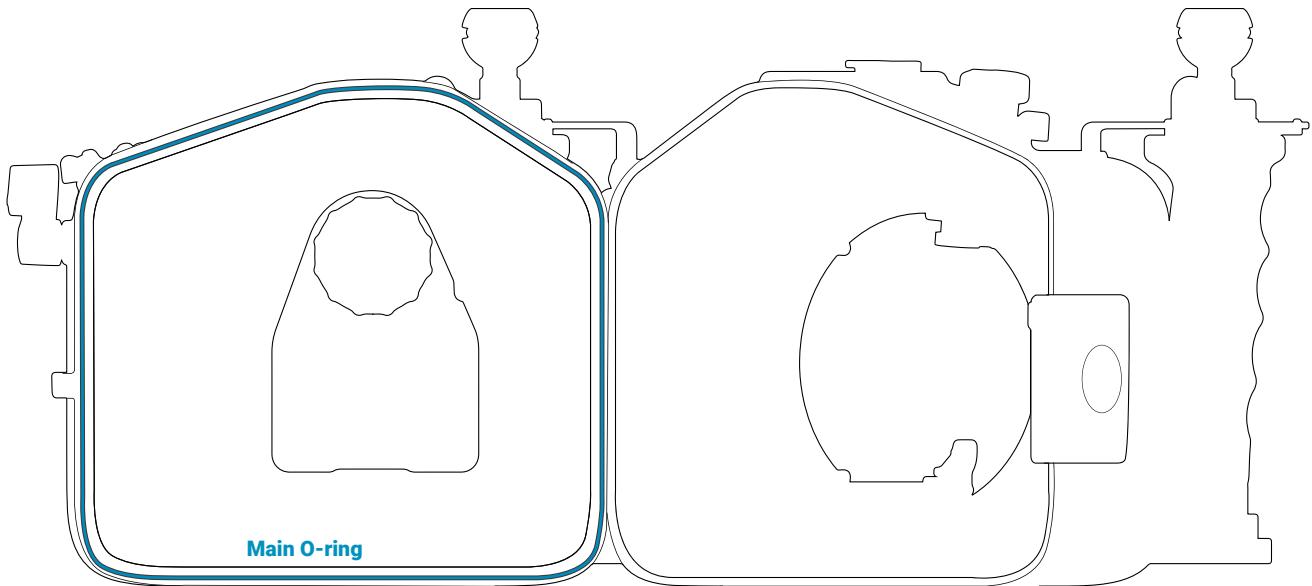

1

remove the main O-ring using an O-ring remover

2

clean the O-ring groove with a cloth and ensure that it is free from salt or other foreign materials

3

lightly coat it with provided lubricant


4

return the main O-ring by slowly pressing from one corner to the whole perimeter


PREPARATION FOR USE

* drawings as illustrations only

Setting up moisture alarm

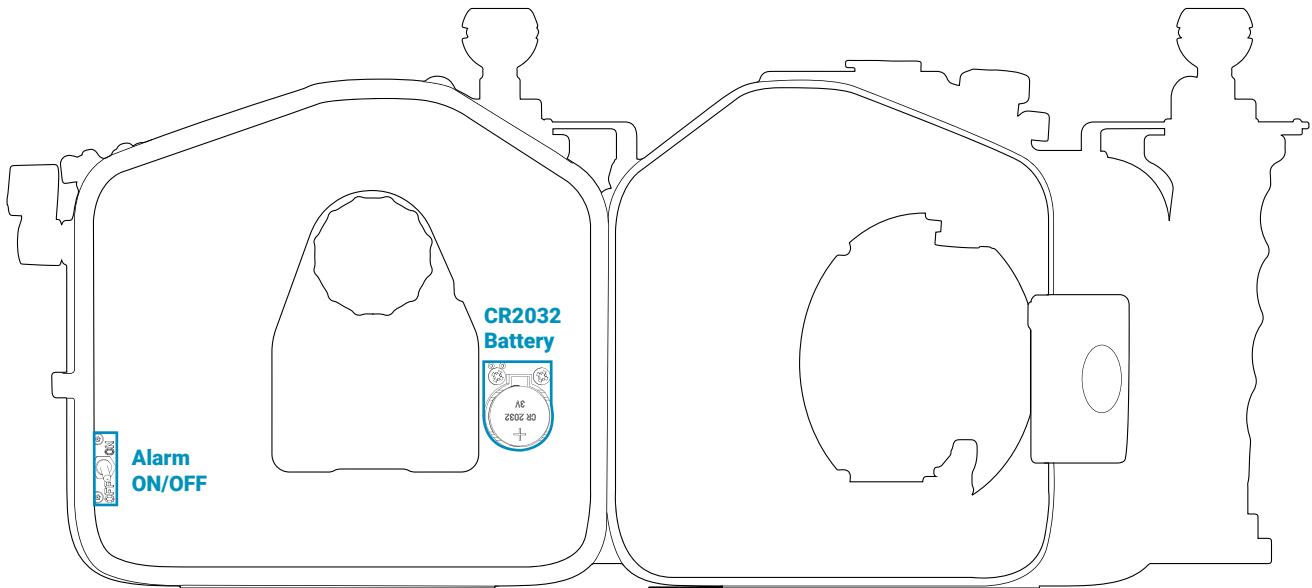


1

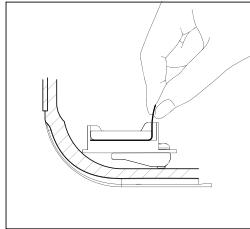


remove battery insulation film

2

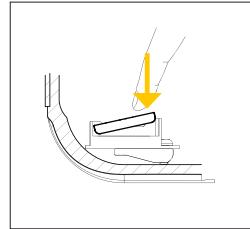

press the battery down until it click into place

3

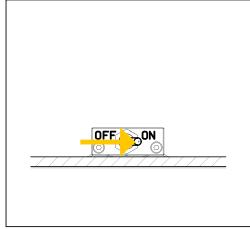


switch on the alarm
- the moisture alarm window will flash in **BLUE** when it is working correctly

PREPARATION FOR USE

* drawings as illustrations only

Changing lens/port without opening the housing

1

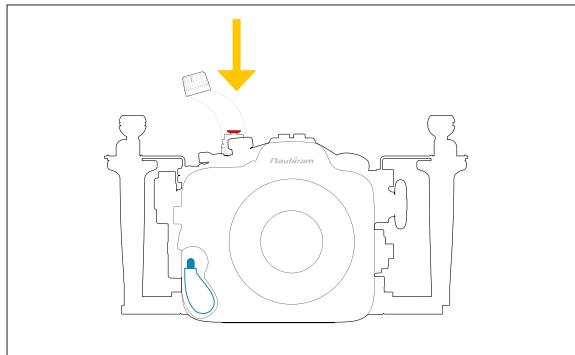


If using with vacuum valve :

remove the cap from the vacuum valve and press the red button to release pressure before unlocking port lock


If using without vacuum valve, please follow from step 2

2

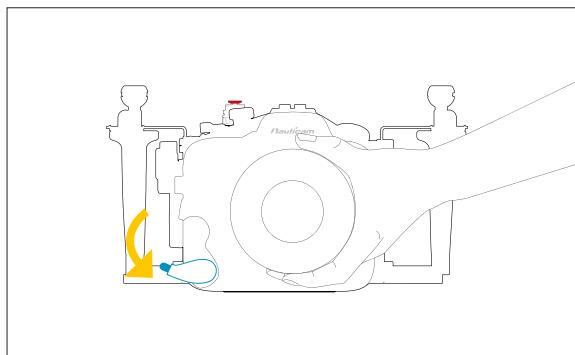


unlock port lock and remove port assembly

3

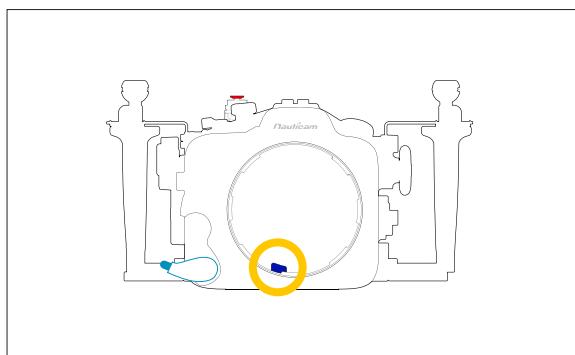

press the blue button to reset vacuum alarm before replacing port

4

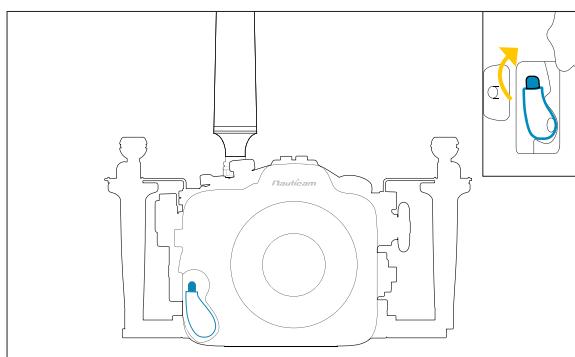

replace port assembly

then reset vacuum valve system using hand pump and close the cap after


* please refer to page 15 on complete vacuum system guidance

OPTIONAL ACCESSORIES

* drawings as illustrations only

Vacuum valve system

1

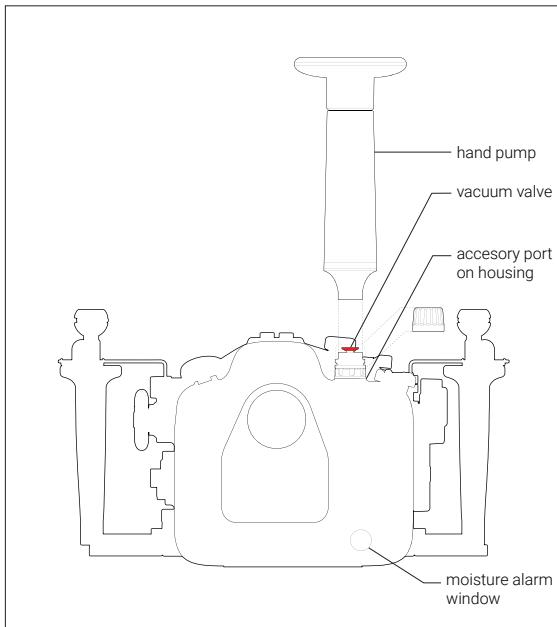


remove the plug of M16 accessory port from the housing

remove the cap from the vacuum valve

slightly lubricate the o-ring and make sure the o-ring is in place

then tighten the vacuum valve to the housing with the tool provided

2

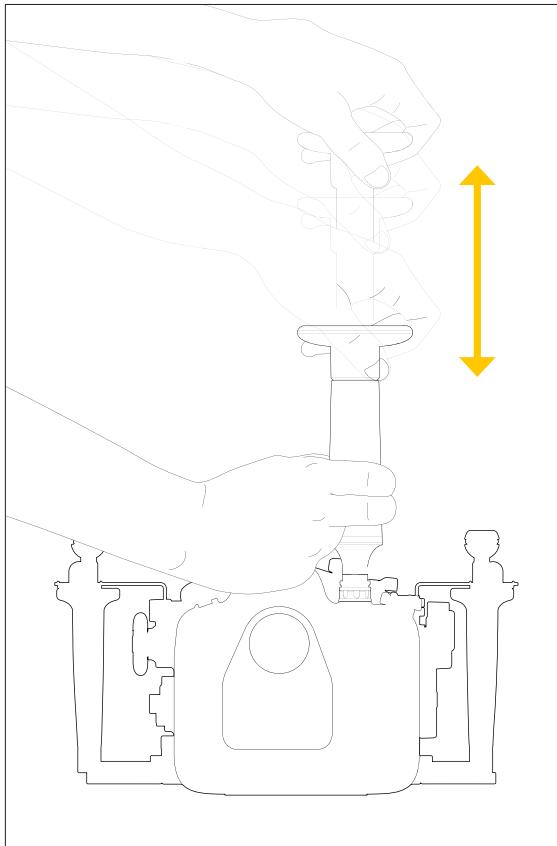

connect hand pump to the valve and pump several times until it reaches the target vacuum level

close vacuum valve cap

Moisture alarm window colour indication :


Steady Blue		device is turned on
Flashing Blue		standby mode, ready for pumping
Steady Green		target vacuum level is reached
Flashing Yellow		vacuum level is dropping
Flashing Red		vacuum is totally lost, circuit stalled until device is switched off
Alternating Blue and Red		vacuum is totally lost, circuit stalled until device is switched on
Steady Red		out of battery

* It is recommended to leave the housing for at least 20mins to ensure it is sealed. If the LED light changes from steady green light to rapidly flashing yellow light, that means there is a leakage. Please check every O-ring and then conduct the vacuum test again.


* please contact our authorized service centers if testing fails

OPTIONAL ACCESSORIES


Installing Viewfinder

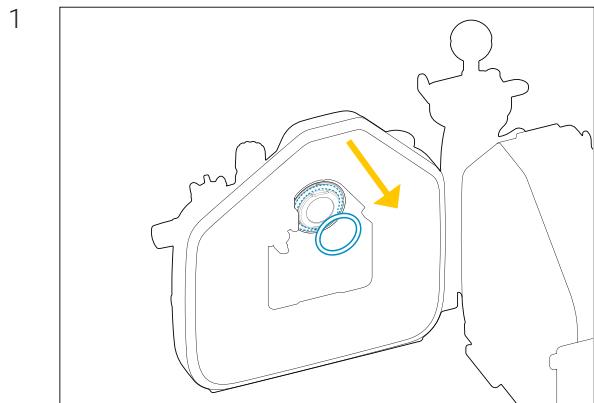


1 firstly remove the pre-installed 0.66x viewfinder from the housing by removing the retainer o-ring inside rear housing

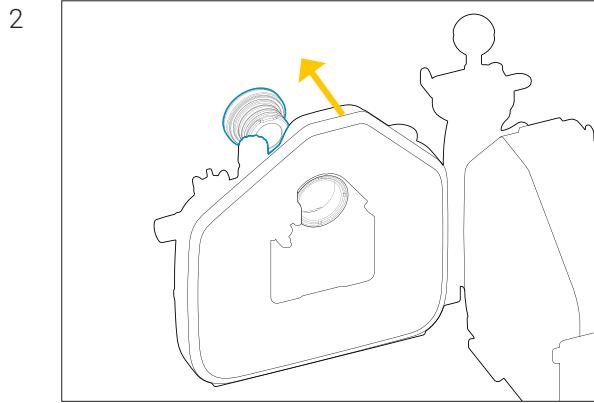


2 gently push the 0.66x viewfinder from the inside of the housing

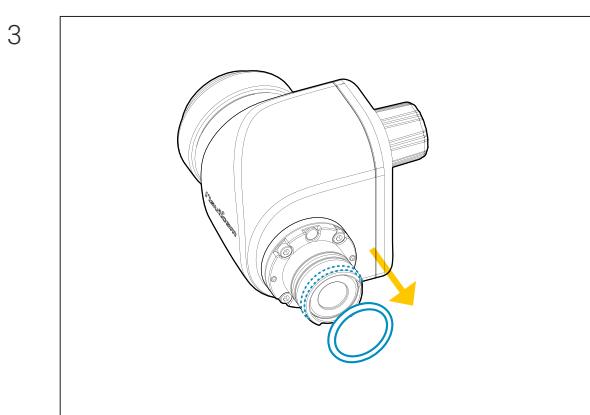

3 remove the retainer o-ring from the viewfinder

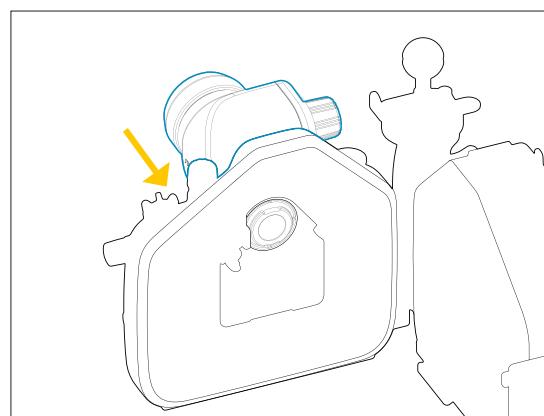

4 align the viewfinder alignment pins with the LCD display window and push the viewfinder into the housing until it cannot go in any further

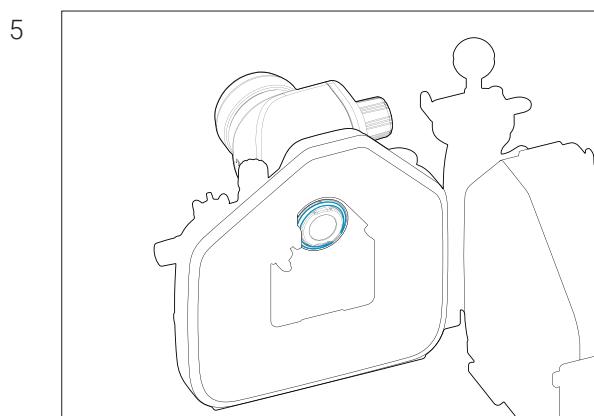

5 lightly lubricate the retainer o-ring and place it back from inside the housing

CARE/STORAGE

1

Soak the housing system in fresh water after salt water usage

2

Operate all controls and buttons at least 3 times while immersed in fresh water

3

We recommend cleaning and inspecting the main O-ring each time after diving for any damage and every time the housing is opened.

4

Protect the housing with robust and shock-proof travel case during transportation. Do not travel with camera inside housing.

5

We recommend to ship the housing to our servic centers for a complete overhual after 500 dives/every 3 years.

WARRANTY

All NAUTICAM Housing Products and Viewfinders are warranted against any material and manufacturing defects for two years from the date of purchase for consumer use. NAUTICAM Optical Accessories are warranted against material and manufacturing defects for a period of one year, and HDMI cables carry a year warranty.

This warranty only applies to products purchased from authorized NAUTICAM dealers and does not extend beyond the original retail purchaser.

To return your product for service, please contact your regional authorized service center(s). Please note that this warranty only applies when the product is purchased in the territory where the service center is located.

NAUTICAM accepts no liability for any damage to and defects in the housing caused by improper use and/or poor maintenance; it is the responsibility of the owner to carefully follow the instructions in our manuals.

NAUTICAM does not hold responsibility for damage, of any nature, to any equipment used with and/or placed within our products.

NAUTICAM accepts no liability for any loss of captured images or the inability to capture images even if it is due to the malfunctioning of our products.

Unauthorized modifications and/or repairs of our products will automatically invalidate the warranty.

SPECIFICATIONS

Construction

Housing body	Hard Anodized Aluminium Alloy
Display window	Abrasion Resistant Polycarbonate

Dimensions

Width	332 mm
Height	189 mm
Depth	141 mm

Weight

In air	2.6 kg
Buoyancy in water	Positive 45g (incl. camera with battery)

Depth

Rating	100 m
--------	-------

Port specifications

Port mount	N120 RF Mount II (for C50/R6III)
Port accessories	1 x M24, 1x M16

Surface USB-PD Power bank

26325 USB-C Bulkhead with USB-C Connector
26326 M24-M16 Adaptor for use with 26325

Lanyard

25413 27cm Lanyard with 2 Snap Hooks

Viewfinder

32211 Nauticam Full Frame Straight Viewfinder 32°/ 1:1
32212 Nauticam Full Frame Straight Viewfinder 40°/ 0.8:1
32213 Nauticam Full Frame Angle Viewinder 32°/ 1:1
32214 Nauticam Full Frame Angle Viewinder 40°/ 0.8:1
87213 Reverse Angled Viewfinder for EMWL 40°/ 0.8:1

87214 Reverse Straight Viewfinder for EMWL 40°/ 0.8:1
87215 Reverse Angled Viewfinder for EMWL 32°/ 1:1
87216 Reverse Straight Viewfinder for EMWL 32°/ 1:1
* 32212/32214 is Preferred.

Buoyancy options

72261 Ø70x200mm Carbon Fibre Aluminium Float Arm (Buoyancy 370g)
72262 Ø70x250mm Carbon Fibre Aluminium Float Arm (Buoyancy 520g)
72263 Ø70x300mm Carbon Fibre Aluminium Float Arm (Buoyancy 670g)
72264 Ø90x170mm Carbon Fibre Aluminium Float Arm (Buoyancy 450g)
72265 Ø90x220mm Carbon Fibre Aluminium Float Arm (Buoyancy 720g)

72266 Ø50x200mm Carbon Fibre Aluminium Float Arm (Buoyancy 160g)
72267 Ø50x250mm Carbon Fibre Aluminium Float Arm (Buoyancy 240g)
72268 Ø50x300mm Carbon Fibre Aluminium Float Arm (Buoyancy 320g)
72233 Single Bayonet Holder II for Ø70 Float Arm
72234 Double Bayonet Holder II for Ø70 Float Arm

72243 Single Bayonet Holder II for Ø90 Float Arm
72244 Double Bayonet Holder II for Ø90 Float Arm
83252 Bayonet Holder for Arms
83253 Double Bayonet Holder for Arms
83254 Bayonet Lens Holder for Inon Float Arms

87516 EMWL Bayonet Holder for Ø70 Float Arm
87517 EMWL Bayonet Holder for Ø90 Float Arm

FLASH TRIGGERING

Optical

Manual Flash Trigger

26305 mini Flash trigger for Fujifilm/Canon
26321 TTL Flash Trigger for Canon

* 26216 Universal Optical Fiber Cable is Required

Electrical

25017 M14 6 pin Bulkhead for Canon System
25020 Canon Hotshoe plug to a M14 Nikonos Bulkhead
26326 M24-M16 Adaptor for use with 26325

WET LENS COMPATIBILITY

*please refer to Nauticam port charts for more setup information.

Nauticam optical lenses

Macro	81202 Super Macro Convertor 2
	81203 Super Macro Convertor 3
	81301 Compact Macro Convertor 1
	81302 Compact Macro Convertor 2
	81501 Mid-range Focus Optimizer 1
	81503 Mid-range Focus Optimizer 3
Macro to Wideangle	86201 Macro to Wideangle Lens 1 (MWL-1) 150 deg. FOV with full frame 60mm macro lens
	87303 EMWL Set #3
	87203 EMWL Focusing Unit #3 (for Canon RF 100mm f2.8 Macro)
	87211 EMWL 150mm Relay Lens
	87212 EMWL Angled Relay Lens
	87221 EMWL 60° Objective Lens
	87222 EMWL 100° Objective Lens
	87223 EMWL 130° Objective Lens
	87226 EMWL 160° Objective Lens
Wideangle	83202 Wet Wide Lens 1B (WWL-1B) 130 deg. FOV with compatible 28mm lenses (incl. float collar)
	83203 Wet Wide Lens Compact (WWL-C) 130 Deg. FOV with Compatible 24mm Lenses (incl. float collar)
	85204 0.57x Wide Angle Conversion Port - 2 (WACP-2) 140 Deg. FOV with Compatible 14mm Lenes (incl. float collar)
	85205 N100 0.36x Wide Angle Conversion Port Compact (WACP-C)
	85206 N120/N100 0.36x Wide Angle Conversion Port (WACP-1B) (incl. float collar & interchangeable port mounting ring)
	85207 N120/N100 Fisheye Conversion Port (FCP-1) 170 Deg. FOV with Compatible 28mm Lenses (incl. float collar & interchangeable port mounting ring)

Optional wet lens accessories

25101 M67 flip diopter holder for M67 macro ports
25108 M67 Double Flip Holder for M67 Macro Ports
83213 M67 to Bayonet Mount Converter II
83214 Bayonet Mount Adaptor for SMC/CMC
83250 M67 to Bayonet Mount Converter II
83251 M77 to Bayonet Mount Converter II
87501 Flip Holder for EMWL
87512 Shade for 130° Objective Lens
87513 Shade for 100° Objective Lens
87515 M67 Mount to EMWL Focusing Unit
87518 Strobe Mounting Brackets for EMWL Relay Lens

HDMI CONNECTION & MONITOR OPTIONS

HDMI connectivity required accessories (1.4)

25033 Standard HDMI Bulkhead with M16 Thread
26326 M24-M16 Adaptor for use with 26325
25100 HDMI (D-A) 1.4 Cable in 200mm Length
25082 25082 HDMI 1.4 Cable for Ninja V Housing in 0.75m Length
25047 HDMI (D-D) cable in 800mm length

Monitor options (1.4)

16611 Nauticam 7" G7 UW ULTRAHD Monitor
16612 Nauticam 7" T7 UW ULTRAHD Monitor
17927 NA-Shinobi II Housing
17922 Nauticam Atomos Ninja V Housing
* 25033 is included in 17923 monitor housing
* 25082 is required for use with 17922 monitor housing
* 25047 is required for use with 16611/16612 monitor housing

HDMI connectivity required accessories (2.0)

25086 M24 Adaptor for HDMI 2.0 Cable
25099 M24A2R200-M28A1R170 HDMI 2.0 Cable

Monitor options (2.0)

17922 Nauticam Atomos Ninja V Housing for Atomos Ninja V 5"
17922S Nauticam Atomos Ninja V-S Housing for Atomos Ninja V 5"

Optional Monitor Mounting Accessories

17961 Swivel and Tilt Adjustable Monitor Mount System
17954 Tripod Plate
17960 Universal Quadra-Pod Plate

Nauticam International Ltd.

Rm 2203, CCT Telecom Bldg,
11 Wo Shing St,
Fo Tan,
Hong Kong

Tel. +852 - 26902711
Fax. +852 - 26909778
URL. www.nauticam.com
Gallery. www.nauticam.smugmug.com